
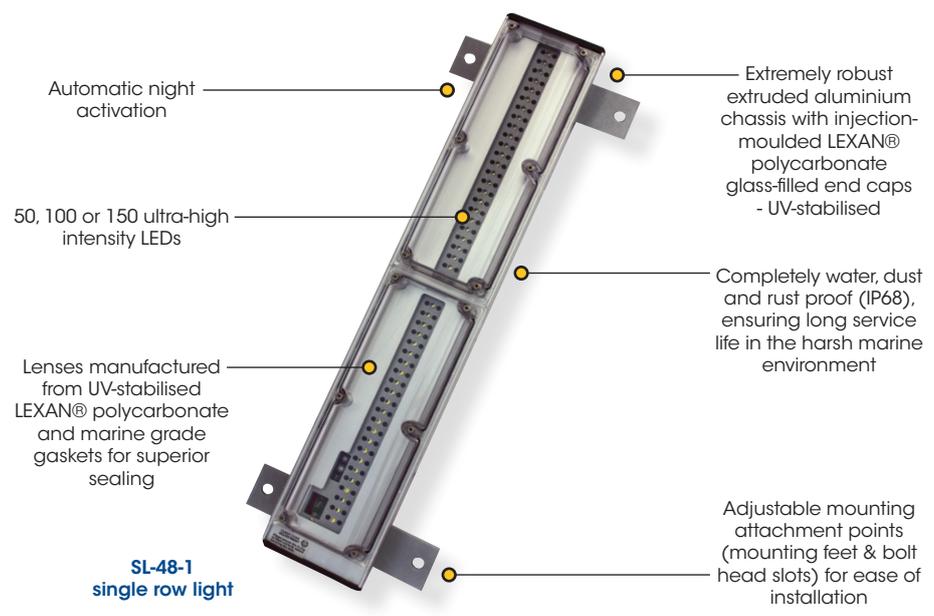


2ft Leading Light

SL-48

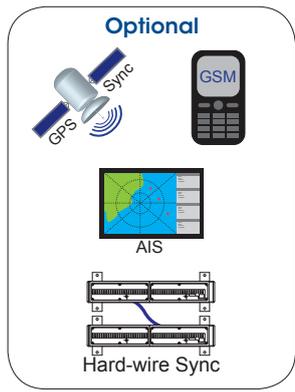

The Sealite Advantage

- Directional 2ft LED leading light
- 7.5 - 13+ nautical mile range
- Robust design ensures a complete seal suitable for extreme weather conditions
- 256 user-adjustable flash characteristics
- Adjustable intensity settings
- Operates in conjunction with existing or purpose-built power supplies
- Optional GPS Synchronisation & GSM Remote Monitoring
- IP68 waterproof
- Optional solar powered configurations available

The SL-48 is a 2ft LED leading light designed to offer vessels clear night navigation and is a convenient replacement for conventional lead lighting.

The unit is available in 3 configurations utilising either single, dual, or triple row LED circuits as a light source.

The advanced circuitry of the SL-48 series comprise of a DC/DC converter, current control and automatic night activation.

The innovative, robust design of the SL-48 leading light ensures years of reliable, maintenance-free service. The unit is completely water, dust & rust proof, and vandal resistant.


The SL-48 body is made from extruded aluminium with injection-moulded UV-stabilised LEXAN® polycarbonate glass-filled end caps for superior strength and durability. Single, dual and triple row versions have the same body width.

Individual injection-moulded LEXAN® polycarbonate lenses are fitted to the aluminium body with a marine grade gasket ensuring a superior sealing (IP68 waterproof).

The aluminium housing features 2x channels/slots which run along the entire length of the base of the SL-48. This multi-mount design allows the 2x mounting brackets/feet to be positioned as required for complete installation flexibility.

The unit operates from a standard 8 - 20 volt power supply, and may be run from a mains powered system or with solar and battery backup in the event of power failure.

The SL-48 leading light is also available with hard-wire or GPS Synchronisation and GSM Remote Monitoring and Control capabilities. When leading lights flash in synchronisation, they can be clearly distinguished from other nav aids and confusing background lighting.

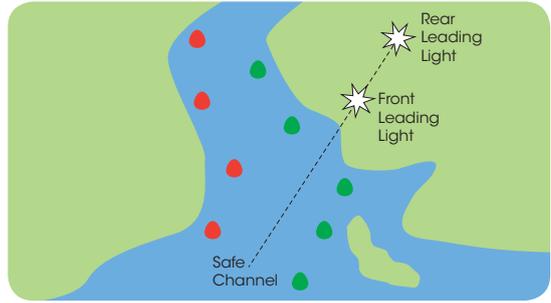

2ft Leading Light


SL-48



Ease of flash setting selection (where required) via internal rotary switches



Brisbane, Australia

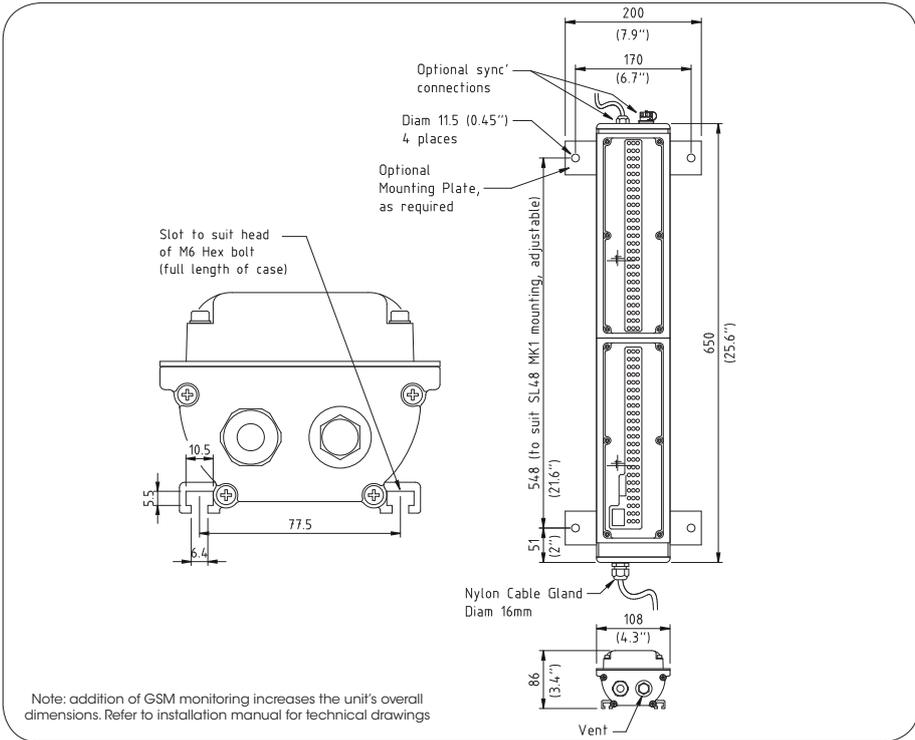

Note: addition of GSM monitoring increases the unit's overall dimensions. Refer to installation manual for technical drawings

SPECIFICATIONS* *

SL-48-1

Single Row

SL-48-2

Dual Row

SL-48-3

Triple Row

Light Characteristics

Light Source
Available Colours
Typical Maximum Intensity (cd) †
Visible Range (NM)

50 ultra-high intensity LEDs
Red, Green, White, Yellow, Blue
Red - 1540 Green - 2220 White - 2220
Yellow - 1320 Blue - 430
AT @ 0.74: 7.5-10.5+
AT @ 0.85: 10-15+

100 ultra-high intensity LEDs
Red, Green, White, Yellow, Blue
Red - 3070 Green - 4160 White - 4020
Yellow - 2570 Blue - 770
AT @ 0.74: 8.5-12+
AT @ 0.85: 11.7-17.5+

150 ultra-high intensity LEDs
Red, Green, White, Yellow, Blue
Red - 4560 Green - 6300 White - 5680
Yellow - 3820 Blue - 1140
AT @ 0.74: 9.5-13+
AT @ 0.85: 13.3-19.2+

Horizontal Output (degrees)
Vertical Divergence (degrees)
Available Flash Characteristics

15
15
Up to 256 IALA recommended
(user adjustable)

15
15
Up to 256 IALA recommended
(user adjustable)

15
15
Up to 256 IALA recommended
(user adjustable)

Intensity Adjustments
LED Life Expectancy (hours)

User adjustable
>100,000

User adjustable
>100,000

User adjustable
>100,000

Electrical Characteristics

Current Draw (mA)
Circuit Protection
Nominal Voltage (V)
Temperature Range

Red, Yellow - 510
Blue, Green, White - 430
Polarity protected
12
-40 to 80°C

Red, Yellow - 1020
Blue, Green, White - 860
Polarity protected
12
-40 to 80°C

Red, Yellow - 1530
Blue, Green, White - 1290
Polarity protected
12
-40 to 80°C

Physical Characteristics

Body Material

Extruded aluminium chassis with LEXAN® polycarbonate glass-filled end caps - UV-stabilised
LEXAN® Polycarbonate - UV-stabilised

Extruded aluminium chassis with LEXAN® polycarbonate glass-filled end caps - UV-stabilised
LEXAN® Polycarbonate - UV-stabilised

Extruded aluminium chassis with LEXAN® polycarbonate glass-filled end caps - UV-stabilised
LEXAN® Polycarbonate - UV-stabilised

Lens Material

Slots to suit head of M6 Hex bolt (full length of light body) & 4 x 11.5mm mounting holes (mounting feet)
86 / 3²/₈
200 / 7⁷/₈ (including feet)

Slots to suit head of M6 Hex bolt (full length of light body) & 4 x 11.5mm mounting holes (mounting feet)
86 / 3²/₈
200 / 7⁷/₈ (including feet)

Slots to suit head of M6 Hex bolt (full length of light body) & 4 x 11.5mm mounting holes (mounting feet)
86 / 3²/₈
200 / 7⁷/₈ (including feet)

Height (mm/inches)

Width (mm/inches)

Length (mm/inches)

Mass (kg/lbs)

Product Life Expectancy

Up to 12 years

Up to 12 years

Up to 12 years

Certifications

CE
IALA

EN61000-6-3:1997. EN61000-6-1:1997
Signal colours compliant to IALA
E-200-1
ISO9001:2008
IP68

EN61000-6-3:1997. EN61000-6-1:1997
Signal colours compliant to IALA
E-200-1
ISO9001:2008
IP68

EN61000-6-3:1997. EN61000-6-1:1997
Signal colours compliant to IALA
E-200-1
ISO9001:2008
IP68

Quality Assurance

Waterproof

Intellectual Property

Trademarks

SEALITE® is a registered trademark of Sealite Pty Ltd
3 years

SEALITE® is a registered trademark of Sealite Pty Ltd
3 years

SEALITE® is a registered trademark of Sealite Pty Ltd
3 years

Warranty*

Options Available

- Power supplies/systems
- Hard-wire Synchronisation
- GPS Synchronisation
- GSM Remote Monitoring & Control Capabilities
- AIS Remote Monitoring
- Additional cable

- Power supplies/systems
- Hard-wire Synchronisation
- GPS Synchronisation
- GSM Remote Monitoring & Control Capabilities
- AIS Remote Monitoring
- Additional cable

- Power supplies/systems
- Hard-wire Synchronisation
- GPS Synchronisation
- GSM Remote Monitoring & Control Capabilities
- AIS Remote Monitoring
- Additional cable



* Specifications subject to change or variation without notice
* Subject to standard terms and conditions
† Intensity setting subject to solar availability

