Dräger



Cleaning and disinfecting full-face masks

Procedures and specifications (machine and manual)

WHY CARING FOR YOUR MASK IS IMPORTANT

The full-face mask supplies breathing air and protects the wearer's face and eyes against aggressive media. To maintain these functions, correct cleaning and disinfection (washing) and proper handling are essential. This alone prevents application errors and counteracts excessive material wear.

WHY YOU SHOULD TAKE A CLOSE LOOK

Apparent small details can make a big difference. Please read the information on preparation carefully and pay good attention to details:

- Temperature specifications
- Concentration
- Soak time etc.

WHICH PRODUCTS WILL BE USED FOR RECONDITIONING

On the following pages, you will find explanations for manual and machine cleaning and disinfection of full-face masks using the following detergents:

- Incidin® Rapid
- Sekusept® Cleaner
- Eltra®
- Sekumatic® FDR

WHEN AND HOW TO CLEAN AND DISINFECT CORRECTLY

To let you know at a glance what is important and when, we have prepared a graphic representation of the different cleaning and disinfection phases for you.

Machine reconditioning

of full-face masks


PREPARATION & IMPORTANT INFORMATION

Drum-type washing machine

- Remove accessories, exhalation valve and inner mask.
- The masks must be placed in the washing bag packed and sealed.
- Secure helmet adapters, if applicable, or use a suitable washing bag.

Dishwasher/cleaning and disinfection device

 Remove accessories, exhalation valve and inner mask and place them in the rinse basket, if applicable.

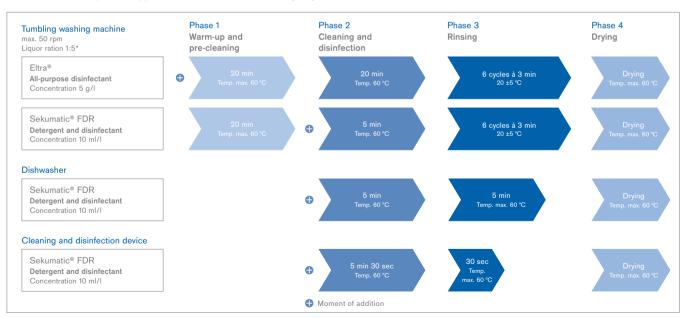

Manual reconditioning

of full-face masks

PREPARATION & IMPORTANT INFORMATION

- Remove accessories, exhalation valve and inner mask.
- No residue of skin care products must remain on the mask after thorough cleaning.
- Do not use solvents, such as acetone or alcohol, or detergents with abrasive particles for cleaning.
- Facepieces with a visor marked with PCaf or PC/CC must not be cleaned or dried using a cloth, because the coating may be damaged. After drying, the facepieces should be aired without being packed for at least one day at standard atmospheric conditions (DIN EN ISO 291).



simplified representation

General

information

BEFORE AND DURING CLEANING

- Adherence to the washing parameters (dosage, soak time etc.)
 must be ensured.
- The Instructions for Use of the mask, the machine and the detergent (incl. dosage table) must be strictly adhered to.
- Washing machines should be serviced regularly.
- Washing bags should be replaced if heavily worn or damaged.
- The washing drum must always be fully loaded. If necessary, you can also wash dummy masks.
- Masks should be packed in dry bags when using a tumble dryer.
- Some mask versions are excluded from approval for machine reconditioning; detailed information can be found in the respective washing instructions from Dräger.

AFTER CLEANING

 After the washing and drying process, the masks must be subjected to a visual, leak and functional inspection.

CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA Moislinger Allee 53–55 23558 Lübeck, Germany

www.draeger.com

Manufacturer:

Dräger Safety AG & Co. KGaA Revalstraße 1 23560 Lübeck, Germany

Locate your Regional Sales Representative at: www.draeger.com/contact



REGION EUROPE CENTRAL AND EUROPE NORTH

Dräger Safety AG & Co. KGaA Revalstraße 1 23560 Lübeck, Germany Tel +49 451 882 0 Fax +49 451 882 2080 info@draeger.com

REGION EUROPE SOUTH

Dräger Safety France SAS 25, rue Georges Besse 92182 Antony Cedex Tel +33 1 46 11 56 00 Fax +33 1 40 96 97 20 europe.south@draeger.com

REGION MIDDLE EAST, AFRICA

Dräger Safety AG & Co. KGaA Branch Office P.O. Box 505108 Dubai, United Arab Emirates Tel +971 4 4294 600 Fax +971 4 4294 699 contactuae@draeger.com

REGION ASIA PACIFIC

REGION CENTRAL

Draeger Safety Asia Pte Ltd 25 International Business Park #04-20/21 German Centre Singapore 609916 Tel +65 6308 9400 Fax +65 6308 9401 asia.pacific@draeger.com

AND SOUTH AMERICA

Dräger Panama S. de R.L. Complejo Business Park, V tower, 10th floor Panama City Tel +507 377-9100 Fax +507 377-9130 contactcsa@draeger.com